

Cascadia Brentwood 5-light drum pendant, Sunset Gold

Product listing capture — Lowes.com, July 8, 2026

Listing: Cascadia Brentwood 5-Light Sunset Gold Mid-century Linen Drum Large Hanging Pendant Light

Lowe's Item #: 7879034 Model #: P0442 Lowe's

Sunset gold finish offers a distinctive look and quality steel construction

White linen fabric provides bright illumination and a mid-century modern-inspired look

Uses 5 x 60 watt E26 medium base bulbs (not included); LED compatible

Supports dimming with dimmable bulbs and a compatible wall switch (not included)

24-in W x 20-in H x 24-in D with round 5-in W x 0.79-in H Canopy

Adjustable height 20-74 inches using 4 x 12-in, 1 x 6-in, 1 x 3-in included down rods, sloped ceiling compatible

Designed for dry locations

Includes mounting hardware and instructions

ETL listed

Source: Lowes.com listing for item #7879034, model P0442. This document reproduces the listing's identity block and complete Overview section as published. The manufacturer document(s) published in this listing's Documents section (Installation Manual) are appended to this PDF.


ASSEMBLY AND INSTALLATION INSTRUCTIONS

P0442

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save this instructions.

Hardware Package (included):

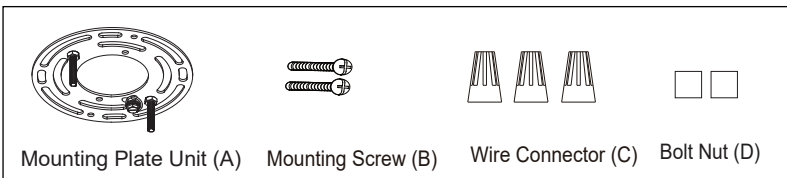

Installation Steps

Turn off the power at fuse or circuit box.


- Unscrew the bolt nuts (D), take out the mounting plate unit (A), then attach to the outlet box by using two mounting screws (B).
- Attach the tube onto the threaded pipe of the fixture.
- Rod Connections:
 - Thread the fixture wire from the fixture through the lower rod, then secure the lower rod onto fixture using the threaded pipe.
 - Thread the fixture wire through the middle rod, and then secure the middle rod onto the lower rod using the threaded pipe.
 - Thread the fixture wire through the upper rod, and then secure the upper rod onto the middle rod using the threaded pipe.


Note: Length adjustable from 20" to 74". Use fewer rods if shorter length is desired.

- Thread the fixture wire through the canopy kit, then secure the rod assembly to the set threaded pipe of the canopy kit.
- Pull out the wires and ground wire from the outlet box. Make wire connections using the wire connectors (C) as follows:
 - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire (bare wire) to the mounting plate unit (A) with the green ground screw, then connect it to the house ground wire with the wire connector (C).

Carefully put the wires back into the outlet box.

- Attach the canopy kit to the mounting plate unit (A) by inserting the fixture mounting screws, then secure it with two bolt nuts (D).
- Install 5 X 60W Max. medium base bulbs (not included).
See relamping label at socket area or packaging for maximum wattage allowed.

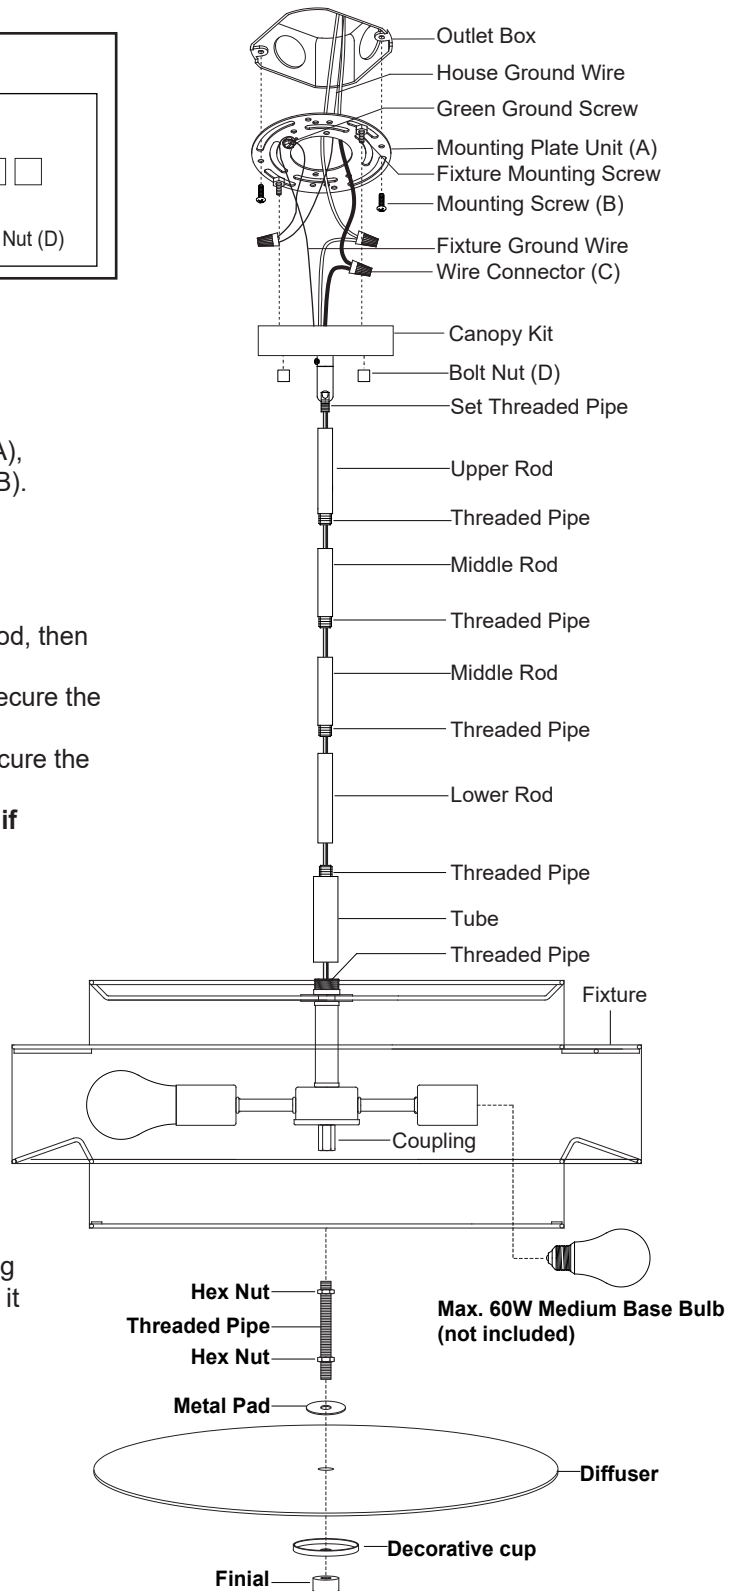

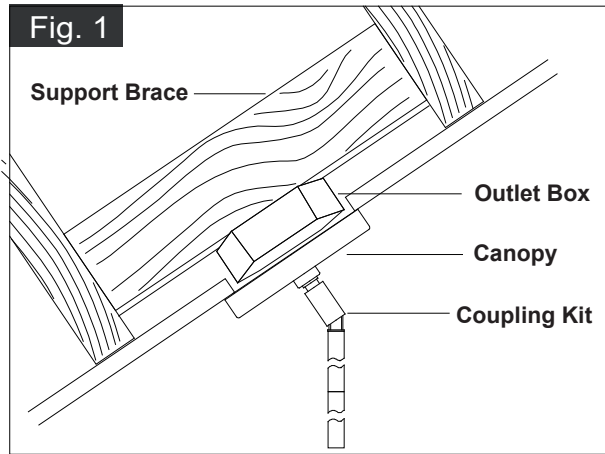

8. Secure the threaded pipe into coupling of the fixture and tighten it with hex nut.
9. Slip the metal pad, diffuser and decorative cup up through the threaded pipe and then secure them with the finial.
NOTE: The depth of hex nut in threaded pipe may need to be adjusted to properly fit the diffuser. The diffuser should be flatly laid on five brackets, and the frosting of the diffuser should be faced down.
10. Angled mounting recommended for a vaulted or angled ceiling. (See Fig.1)

Turn on the power at fuse or circuit box.


The following parts are available for reorder if damaged or missing.

Spare Parts List:

Assembly Kit 7112MM (1 SET)

Mounting Plate Unit (A) Mounting Screw (B) Wire Connector (C) Bolt Nut (D)

12" Rod 3437RD 6" Rod 3438RD 3" Rod 3439RD

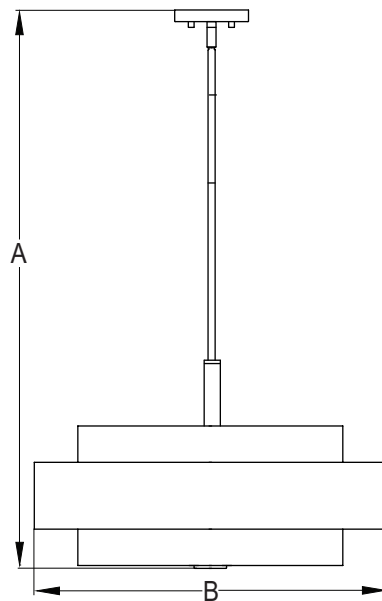

A: 20"~74"

B: 24"

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?

info@vaxcel.com
1-800-482-9235